
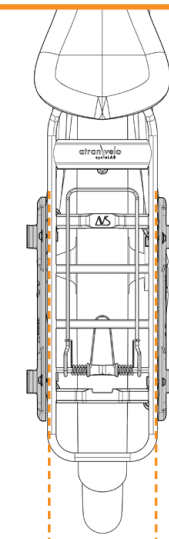
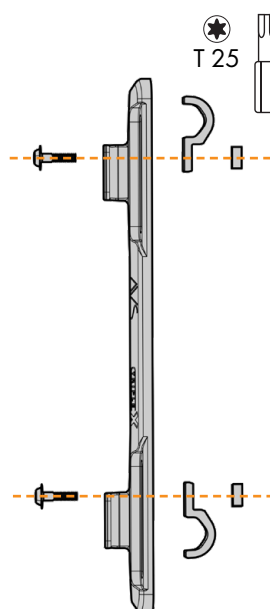
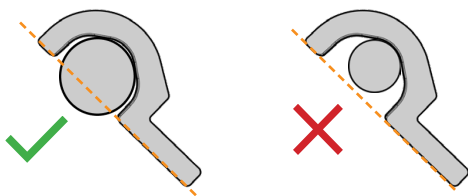
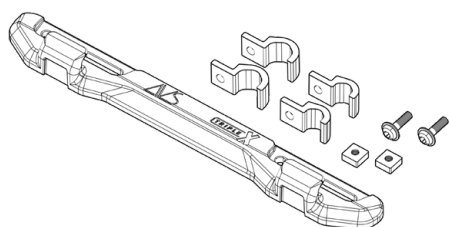




AVS SIDE UNI


AtranVelo AB
Vinbergsvägen 4
311 50 Falkenberg
info@atranvelo.com


10kg
Max load

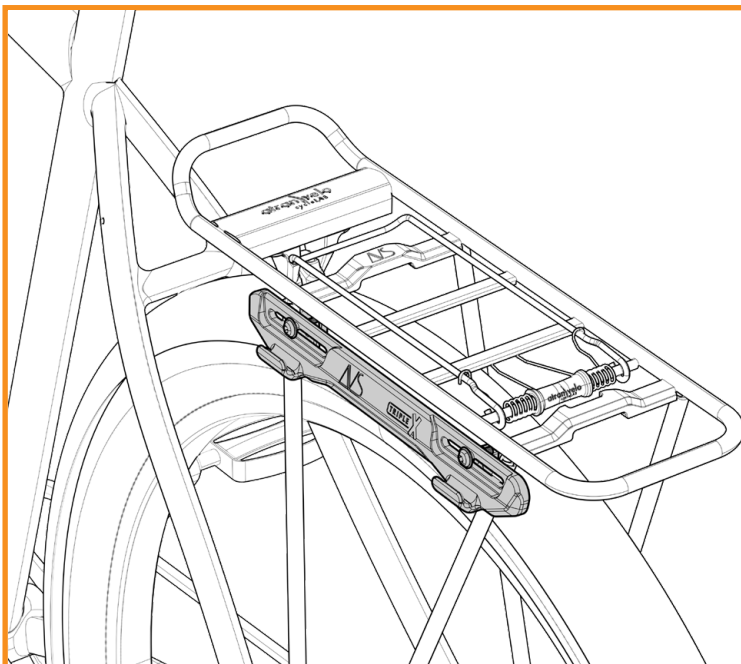

Compatible on
both sides

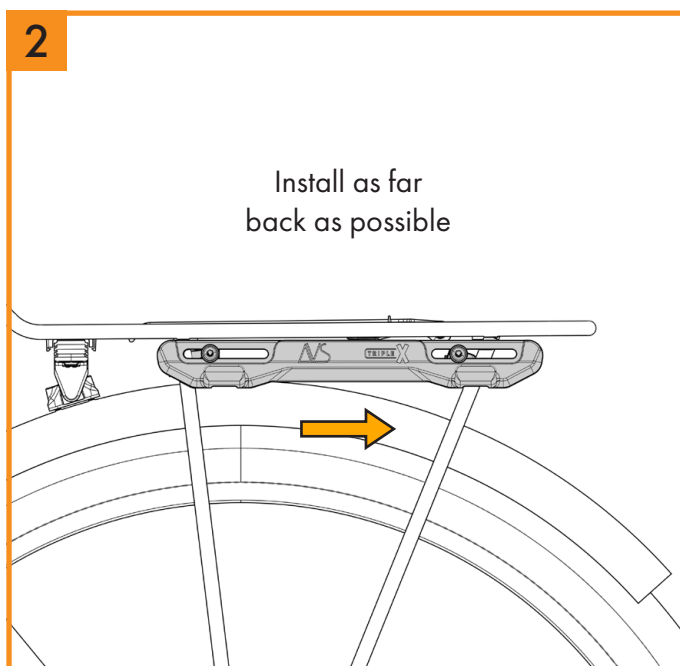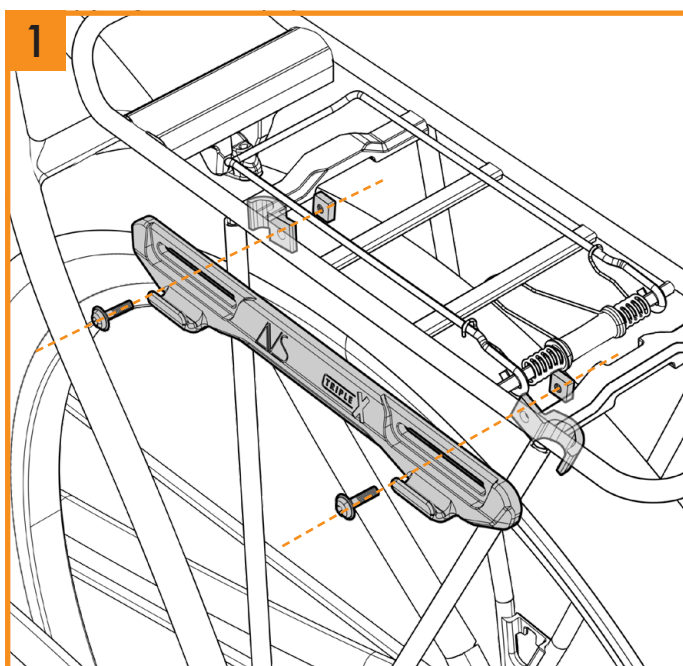

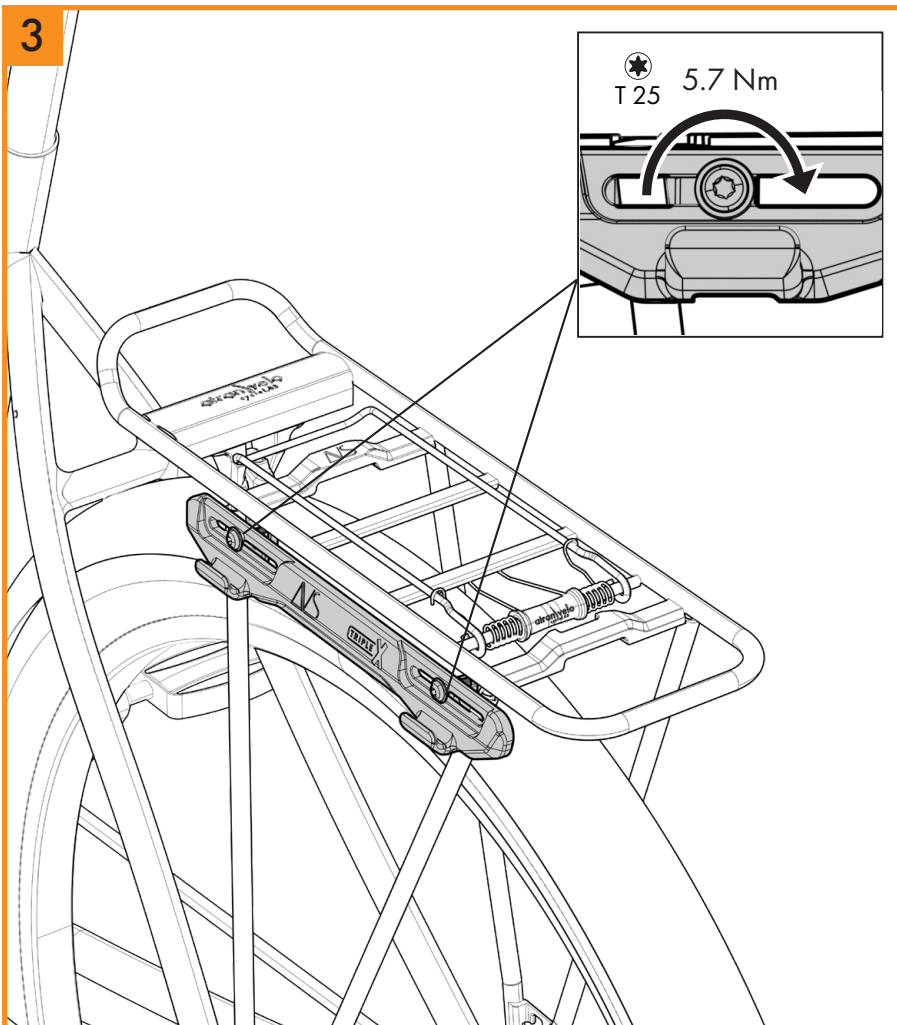

Read the instructions carefully for correct and safe installation. Pictures or sketches do not prevent reading and understanding the text in this instruction. For more information about AtranVelo visit us at www.atranvelo.com. If you have questions about the AVS SIDE UNI or these instructions, please, contact our customer service via info@atranvelo.com

Failure to follow this instruction may result in injury. OUR INSTRUCTIONS ON THE ARTICLE MAY BE UPDATED/CHANGED. CHECK OUR WEBSITE FOR ANY UPDATES. www.atranvelo.com

Warning!

- Maximum load capacity of AVS SIDE UNI is 10 kg / 22 lbs.

- Check the AVS SIDE UNI and the AVS accessories regularly to ensure they are functional and not damaged. The slightest sign of deviation must be corrected immediately. If so, contact the dealer where the accessories were purchased for proper review and possible action.

- Under no circumstances may the AVS SIDE UNI be modified.

- Do not exceed the maximum load capacity.

- Before heading out on the road, check that the AVS SIDE accessory does not disturb the foot/heel when pedaling around the pedal.

- Before the bicycle ride check that there are no loose straps that can get caught in the wheel and reflectors and lamps such that these are not obscured when the accessories are attached to the luggage carrier.

- The bicycle can behave differently when luggage is loaded onto the AVS SIDE UNI. Test ride the bicycle in a safe place before heading out on the road. Be aware that especially the steering and brakes are affected.

